

定流量发生器

Flow Standard

FFM-110 系列 Series



【特点与功能】

Specifications and Functions

● 性能确认(日常检查)

Function Monitoring (Daily Maintenance)

检漏仪是否正确判定为NG产品。

Does the leak tester evaluate reject items as FAIL.

● 精度确认(定期检查)

Sensitivity Verification (Periodical Maintenance)

检漏仪的灵敏度、精度是否正常。

Does leak testing indicate accurate corresponding sensitivity when an established amount of leak is generated.

● 设定参数

Condition Setting (Standard Determination)

模拟实际泄漏率，设定检漏仪参数。

To determine the most appropriate evaluation-setting rate when a certain leak rate is generated.

“泄漏量”的基准器

本产品可以在一定压力下产生标准流量。

Standard of Leakage

This unit is designed to simulate actual generated air flow(leak) for air leak testing settings that had been previously obtained by calculations and pressure rate conversions.



正常检漏模式

Operation Mode
During normal operation, insert the plug to the coupling and seal the test circuit.


测试时接头上安装封堵塞，保持管路的密封状态。



检查模式

Inspection Mode
During inspection, replace the plug with FFM-110.

检查时接头上安装定流量发生器，模拟管路中有一个已知漏率的泄漏。



便于装卸

在测试气路中安装通用接头，测试过程中不需要拆卸管路就可以拆装FFM-110。

Easily Mountable

By pre-connecting the coupling to the test circuit, it is possible to mount the FFM-110 without removing test piping.



Work

产品选型


Model Selection

FFM 1 1 0 —
 ① ②

①压力-漏率范围 Pressure-Leak rate Range	1	-90~1000kPa(不含 without -0.5~0.5kPa), 0.03~400mL/min(正压 positive pressure), 0.2~40mL/min(负压 negative pressure)		
	2	5~30kPa, 100~1000mL/min		
	3	0~2000kPa, 10^{-8} Pa.m ³ /s~ 10^{-4} Pa.m ³ /s		
	②资料 N	标准随机资料 Inspection Sheet	温度-漏率补正曲线图 Temperature - leak rate graph	

介 质 Media	洁净无腐蚀性气体 Clean and non-corrosive gas			
一次侧压力范围 Primary Side Pressure Range	0.5kPa~1000kPa	0kPa	5kPa~30kPa	见附表2 See table 2
二次侧压力范围 Secondary Side Pressure Range	0kPa	-90kPa~-0.5kPa	0kPa	
漏率范围 Leak rate Range	0.03 mL/min~400mL/min (见附表1) See table 1	0.2mL/min~40mL/min (见附表1) See table 1	100mL/min~1000mL/min	10^{-8} Pa.m ³ /s~ 10^{-4} Pa.m ³ /s
制作偏差 Manufacturing deviation	±5%F.S. 或 or ±10%F.S.	±5%F.S. 或 or ±10%F.S.	±5%F.S.	0.5个数量级 0.5Magnitude

FFM-110-1*压力-漏率范围(表1) Pressure-Leak rate Range (table 1)

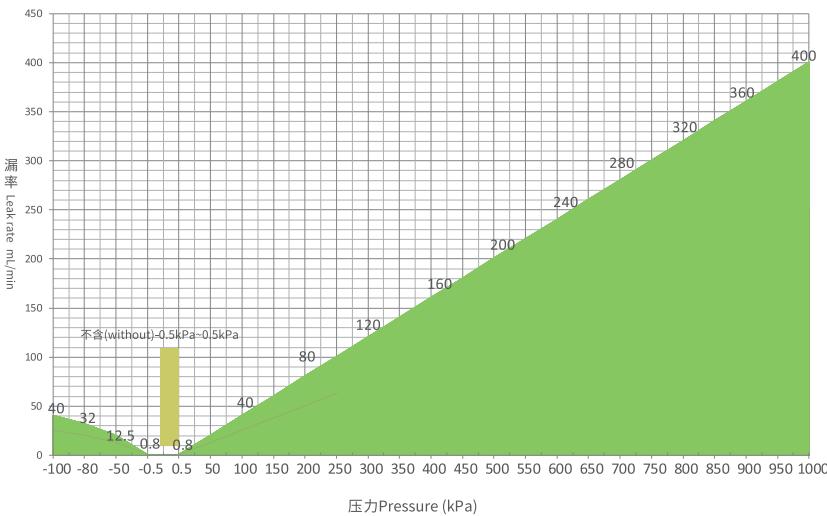

FFM-110-2* 漏率范围(表2) Leak rate Range (table 2)

一次侧压力 kPa Primary Side Pressure(G)	二次侧压力 kPa Secondary Side Pressure(G)	10^{-8} 量级 10^{-8} Magnitude	10^{-7} 量级 10^{-7} Magnitude	10^{-6} 量级 10^{-6} Magnitude	10^{-5} 量级 10^{-5} Magnitude	10^{-4} 量级 10^{-4} Magnitude	0.03~400 mL/min
0	-100	✓	✓	✓	✓	✓	
100	0~-100	✓	✓	✓	✓	✓	
200	0~-200	—	✓	✓	✓	✓	
300	0~-300	—	✓	✓	✓	✓	
400	0~-400	—	✓	✓	✓	✓	
500	0~-500	—	✓	✓	✓	✓	
600	0~-600	—	✓	✓	✓	✓	
700	0~-700	—	✓	✓	✓	✓	
800	0~-800	—	✓	✓	✓	✓	
900	0~-900	—	✓	✓	✓	✓	
1000	0~-1000	—	✓	✓	✓	✓	
2000	0	—	✓	✓	✓	✓	✓

主要产品 ● 气密检漏仪 ● 数字压力表 ● 流量计 ● 自动压力、流量控制器 ● 密封性能检测专用设备

 天津博益气动股份有限公司
TIANJIN BOYI PNEUMATICS CO., LTD.

公司·工厂: 天津开发区泰丰路80号 邮编: 300457

电话: (86)22-59810966 传真: (86)22-59810963

营销中心: 北京市丰台区角门18号名流未来大厦801~805室 邮编: 100068

电话: (86)10-87582461 传真: (86)10-87582462

网址: www.boyiqd.com 邮箱: sales@boyiqd.com



代理商



扫一扫, 查看办事处地址

公司在广州、顺德、杭州、上海、苏州、长沙、武汉、重庆、西安、青岛、沈阳设有分支机构。